

Vertical laminar air flow cabinet, 1200 wide


COMPLIANCE

EN 61010-1, EN 61326-1, EN 61000-6-3

ADVANTAGES

BUT ALSO...

- Audible and visual alarm in case of airflow defect
- White walls for a glare-free brightness
- Microprocessor control system with digital display for airflow velocity
- Electronic compartment located outside the contaminated area
- Smooth walls, rounded corners and no welds ; allowing easy cleaning and decontamination
- Low noise fan
- High intensity of light
- Easy replacement of the filters

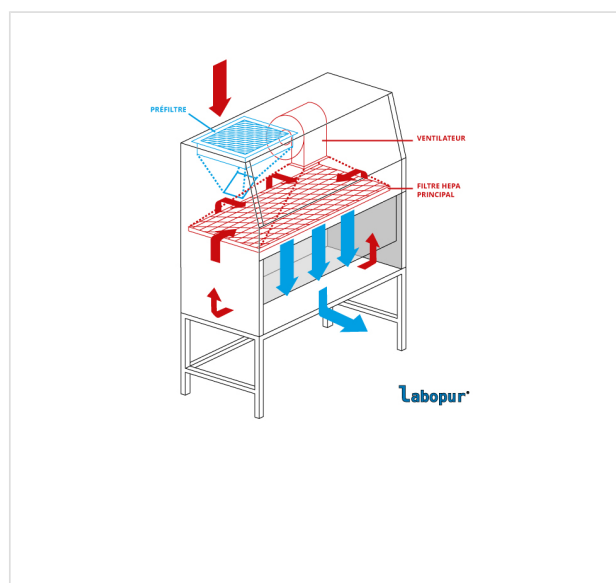

TECHNICAL FEATURES

Model	FLV12	Flow (m3/h)	2150
Compliance	EN 61010-1, EN 61326-1, EN 61000-6-3	Hour counter	Inclus
Shipping dimensions HxWxD (mm)	1500 x 1450 x 850	Voltage (volts)	0.99999
Airflow (m/s)	0,4	Electrical power (W)	760
Voltage (volts)	220	HS Code	84146011

COMPLEMENTARY PRODUCTS

- Front enclosure with UV light for FLV12 (Réf : FACFLV12)
- Support stand for FLV12 and PSM12 (Réf : TH12)
- Gas valve with solenoid valve (Réf : VANGAZ)
- Vacuum valve (Réf : VANVID)

Model	External dimensions HxWxD (mm)	Internal dimensions HxWxD (mm)	Weight (kg)
FLV12	1345 x 1360x 795	620 x 1195 x 630	185.00