

## Vertical laminar air flow cabinet, 1200 wide


### CONFORMITÀ

EN 61010-1, EN 61326-1, EN 61000-6-3

### ADVANTAGES

#### MA ANCHE...

- Audible and visual alarm in case of airflow defect
- Electronic compartment located outside the contaminated area
- High intensity of light
- White walls for a glare-free brightness
- Smooth walls, rounded corners and no welds ; allowing easy cleaning and decontamination
- Easy replacement of the filters
- Microprocessor control system with digital display for airflow velocity
- Low noise fan

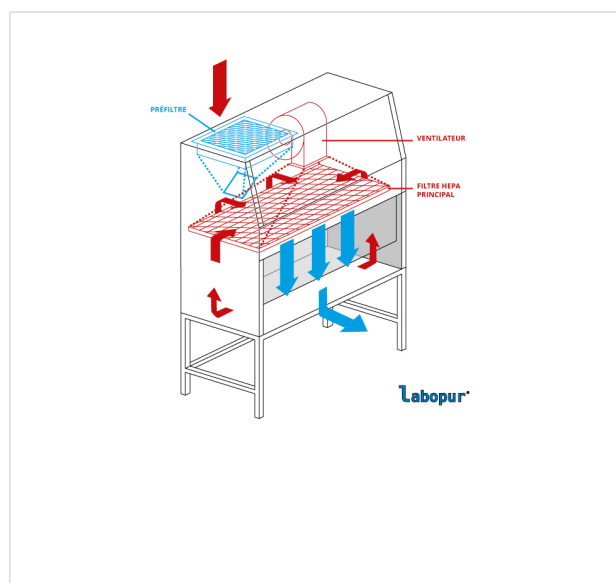

### CARATTERISTICHE TECNICHE

|                                     |   |                       |                 |
|-------------------------------------|---|-----------------------|-----------------|
| Modello                             | <b>FLV12</b>                                | Flusso (m3/h)         | <b>2150</b>     |
| Conformità                          | <b>EN 61010-1, EN 61326-1, EN 61000-6-3</b> | Contaore              | <b>Inclus</b>   |
| Dimensioni di spedizione HxWxD (mm) | <b>1500 x 1450 x 850</b>                    | Voltaggio (volt)      | <b>0.99999</b>  |
| Flusso d'aria (m/s)                 | <b>0,4</b>                                  | Potenza elettrica (W) | <b>760</b>      |
| Voltaggio (volt)                    | <b>220</b>                                  | Codice HS             | <b>84146011</b> |

### PRODUITS COMPLÉMENTAIRES

- Front enclosure with UV light for FLV12 (Réf : FACFLV12)
- Support stand for FLV12 and PSM12 (Réf : TH12)
- Gas valve with solenoid valve (Réf : VANGAZ)
- Vacuum valve (Réf : VANVID)

| Modello | Dimensioni esterne HxWxD (mm) | Dimensioni interne HxWxD (mm) | Peso (kg) |
|---------|-------------------------------|-------------------------------|-----------|
| FLV12   | 1345 x 1360x 795              | 620 x 1195 x 630              | 185.00    |