


MICROBIOLOGICAL SAFETY CABINETS - CLASS II

Functioning diagram ▼



Labopur®

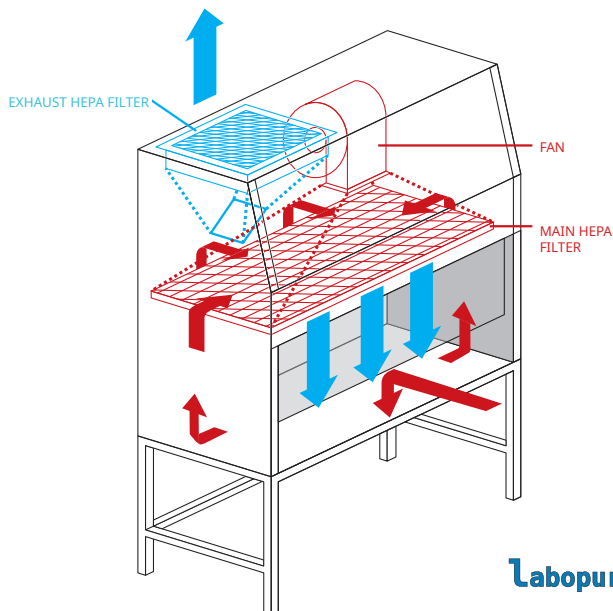


▲ PSM12 + TH12



1 Dashboard



2 Protection screen with hydraulic cylinder and light



3 Electric Plug

PRESENTATION

Providing first class protection for the operator, the environment and the product, Class II microbiological safety cabinets are the instruments of choice when handling hazardous micro-organisms. The airflow is automatically maintained at 0.45m/s. 30% of the air in the work area is expelled from the exhaust HEPA filter and the remaining 70% of the HEPA filtered air is recirculated through the work area. This cycle repeats continuously.

COMPLIANCE

- European Directive 2007/47/EC on medical devices.
- European Directive 2006/95/EC on electrical equipment.
- European Directive 93/68/EC on CE marking.
- European Directive 92/31/EC and 2004/108/EC on electromagnetic compatibility.
- Certified EN 12469.

ADVANTAGES

- Low-noise fan with high light intensity.
- Smooth walls, rounded corners and no welds; allowing easy cleaning and decontamination.
- White walls for glare-free illumination.
- Ergonomic armrest for long periods of handling.
- Electronics compartment located external the contaminated area.
- Easy replacement of HEPA filters by trained personnel.

TECHNICAL FEATURES

- Microprocessor control system with digital display for airflow speed.
- Two H14 HEPA filters with 99.999% efficiency for particles $\geq 0.3\mu\text{m}$.
- Automatic airflow compensation system to prevent filter clogging.
- On-off switch with lock.
- Alarms for: power failure, control system failure, open window, low and high airflow speed, clogged filters.
- Airtight seal by means of a cylinder on the window.
- Cold-rolled sheet steel cabinet, 2 mm epoxy polyester paint.
- Removable worktop in 3 parts, in stainless steel 304.
- 2 power sockets (2.5 A).
- Integrated low voltage lighting and > 1.000 lux - 55W.
- Noise level below 60 dB(A)
- Power supply: 230 V, 50 Hz.
- Power consumption: 1.860 W.

OPTIONS

- Replacement HEPA main and exhaust filters.
- Front wall with integrated UV lamp (length 90 cm, power 30W and wavelength 254 nm).
- TH12 tube table - Gas tap - Vacuum tap.

P/N	PSM12
External dimensions (H x W x D) mm	1400 x 1360 x 795
Internal dimensions (H x W x D) mm	650 x 1190 x 600
External dimensions opening dimensions (H x W) mm	185 x 1190
Work surface dimensions (W x D) mm	1190 x 600
Shipping dimensions (H x W x D) mm	1540 x 1450 x 850
Net weight (kg)	220
Raw weight (kg)	257

© ECOSAFE reserves the right to discontinue or change specifications or designs at any time without notice and without incurring obligations. 09/2021

Fume hoods, filtering cabinets - Ventilation
Lithium-ion cabinets
Flammable cabinets
Corrosive cabinets
Toxic cabinets and Multirisk
Containment and cans
File cabinets
Showers and first-aid equipments